
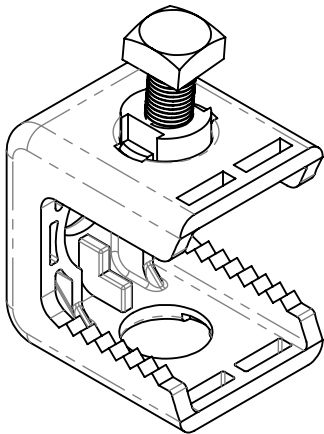


PRODUCT DATA SHEET

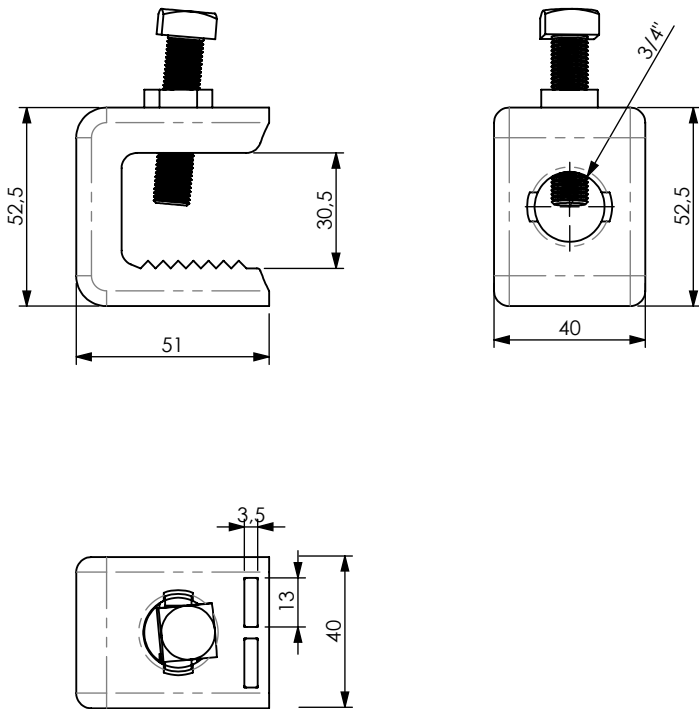

A) SPECIFICATIONS

Material:
Glass reinforced P.A.
U.V. Resistant
Halogen Free

B) RESISTANCE TESTS

Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) INSTALLATION TORQUE

Tighten screw 0.8-1Nm Max

E) MOUNTING INSTRUCTIONS

On request

code	6125232019
article	MDM 2x3/4"P

	
100	0.245kg.

RI	DATE	DR	DATE	AP	<i>Description:</i> MDM 2x3/4"P=Plastic Universal Angle Adaptor 2 holes 3/4" and locking screw
02					
01					
00	27/02/24	G.S.	27/02/24	A.V.	
1 ST EMISSION					
 Building Sustainable Innovation					<i>Use:</i> Heavy Duty monobloc bidirectional plastic clamp available with three 3/4" holes and slots for the installation with two plastic tie wraps to various structures like poles and pylons.