



PRODUCT DATA SHEET

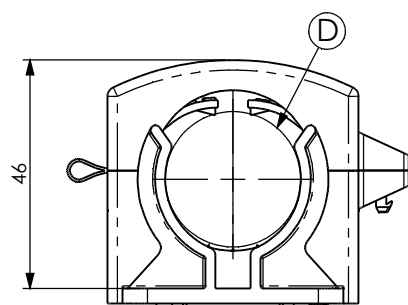

A) SPECIFICATIONS

Cable clamp. Material: P.A.6 UL94-V0
Self Extinguishing, black colour,
halogen free (according to UL94-V0).
1) Elastic provisional pre-fixing of cable.
2) Security locking system.

B) OPERATING TEMPERATURE


Working temperature : -40°C +125°C.
Installation temperature : -20°C +60°C.

C) DELIVERY MODALITIES



Packing in boxes. Label indicating:
product code, article, quantity,
production batch, FIMO logo and figure.
(Customer code on request).

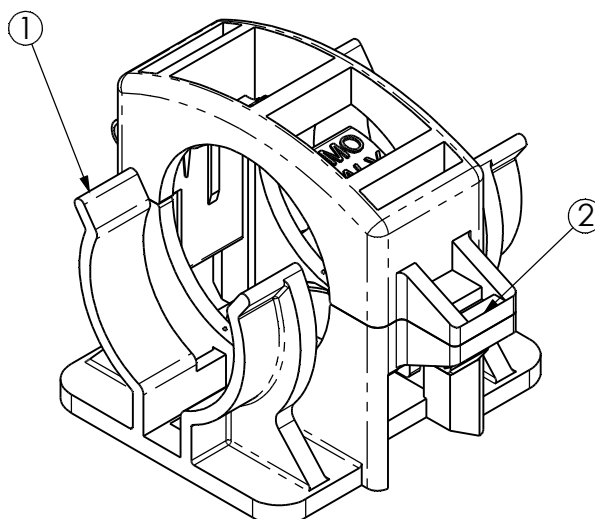

D) MOUNTING INSTRUCTIONS

RAC IST 021 REV2



| | |
|---------|-------------------|
| code | 6150000079 |
| article | RAC 7/8"M |

| | | |
|----------|---|---|
| D |  |  |
| 29-32 | 50 | 0.2125kg |

| RI | DATE | DR | DATE | AP | Description: RAC 7/8"M Radiating Cable Clamps |
|--|------------|------|------------|---|---|
| 02 | | | | | |
| 01 | | | | | |
| 00 | 12/12/2019 | G.S. | 12/12/2019 | A.V. | |
| 1 ST EMISSION | | | | | |
| <div> Building Sustainable Innovation</div> | | | | <div><div>RoHS</div></div> | Use: Installation of radiating cables in tunnel |