

# PRODUCT DATA SHEET

## A) SPECIFICATIONS

- 1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).
- 2 Stainless Steel RSD safety clamp

## B) OPERATING TEMPERATURE



Working temperature : -40°C +125°C.  
Installation temperature : -20°C +60°C.

## C) DELIVERY MODALITIES

Packing in boxes. Label indicating:  
product code, article, quantity,  
production batch, FIMO logo and figure.  
( Customer code on request ).

## D) MOUNTING INSTRUCTIONS

IT043

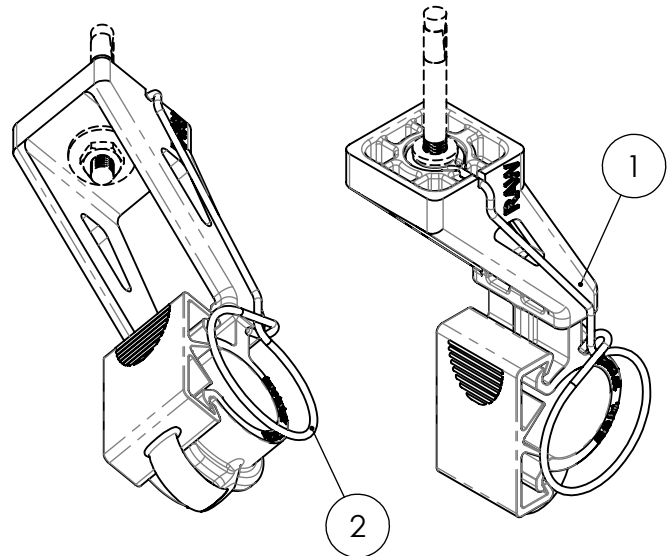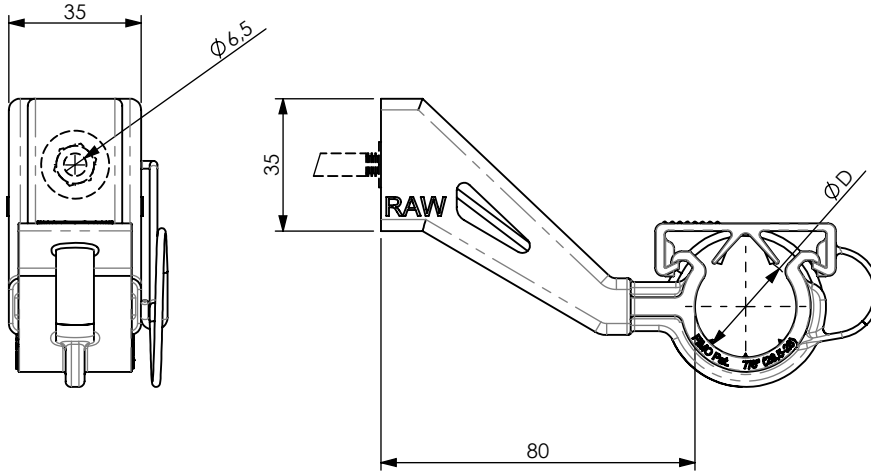

|         |                           |
|---------|---------------------------|
| code    | <b>6150210078</b>         |
| article | RAW 7/8"-80 + RSD 7/8"-80 |

|          |    |          |
|----------|----|----------|
| <b>D</b> |    |          |
| 26.5-28  | 50 | 0.0614kg |

| RI                                                                                  | DATE                     | DR   | DATE                                                                                | AP   | <i>Description:</i><br><br><b>RAW 7/8"-80 + RSD 7/8"-80<br/>Radiating Cable Clamps</b>                                                                                              |
|-------------------------------------------------------------------------------------|--------------------------|------|-------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 02                                                                                  |                          |      |                                                                                     |      |                                                                                                                                                                                     |
| 01                                                                                  |                          |      |                                                                                     |      |                                                                                                                                                                                     |
| 00                                                                                  | 05/12/2016               | E.B. | 05/12/2016                                                                          | A.V. |                                                                                                                                                                                     |
|                                                                                     | 1 <sup>ST</sup> EMISSION |      |                                                                                     |      |                                                                                                                                                                                     |
|  |                          |      |  |      | <i>Use: Horizontal or vertical installation of<br/>radiating cables in tunnel</i><br><br><i>* Suitable for installation in high speed<br/>railway tunnel application (350 km/h)</i> |

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress  
Copyright FI.MO.TEC. S.p.a. All rights reserved.