


PRODUCT DATA SHEET

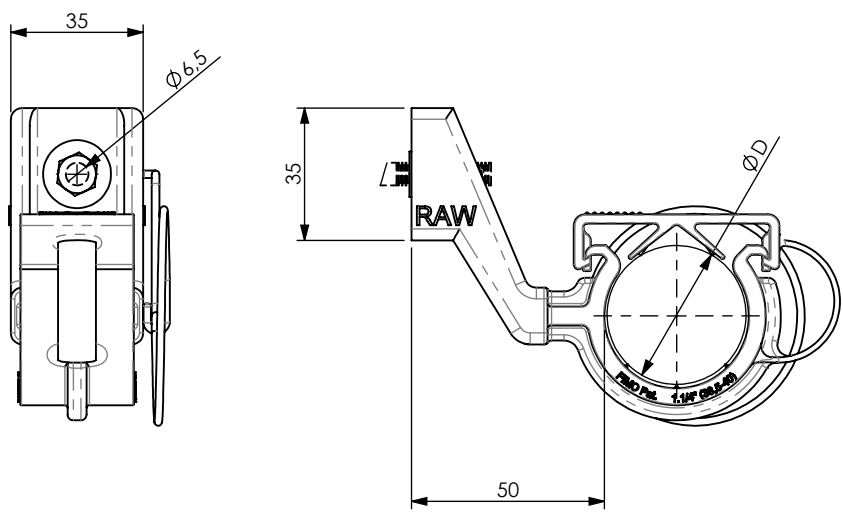

A) SPECIFICATIONS

- 1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).
- 2 Stainless Steel RSD safety clamp

B) OPERATING TEMPERATURE


Working temperature : -40°C +125°C.
Installation temperature : -20°C +60°C.

C) DELIVERY MODALITIES

Packing in boxes. Label indicating:
product code, article, quantity,
production batch, FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IT043

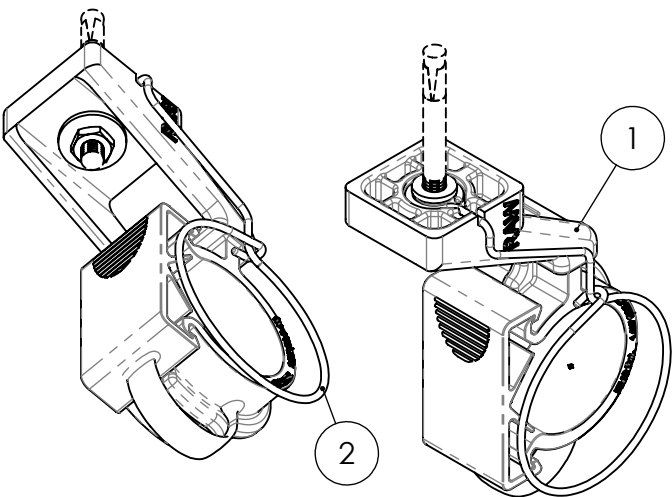

code	6150215114
article	RAW 1.1/4"-50 + RSD 1.1/4"-50

D		
38.5-40	50	0.0629kg

RI	DATE	DR	DATE	AP	<i>Description:</i> RAW 1.1/4"-50 + RSD 1.1/4"-50 Radiating Cable Clamps
02					
01					
00	19/02/2015	E.B.	19/02/2015	A.V.	
	1 ST EMISSION				
 Building Sustainable Innovation					<i>Use: Horizontal or vertical installation of radiating cables in tunnel</i> <i>* Suitable for installation in high speed railway tunnel application (350 km/h)</i>