
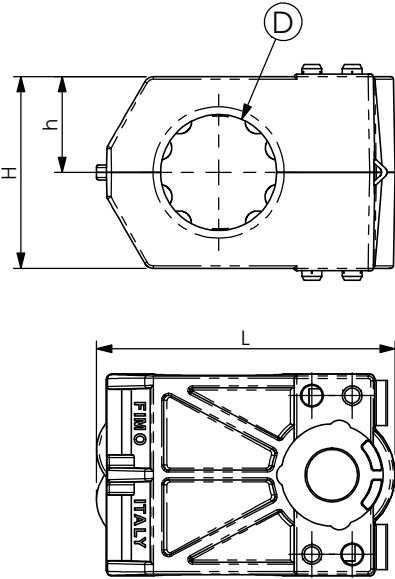


PRODUCT DATA SHEET



A) SPECIFICATIONS
P.P. U.V. resistant

B) RESISTANCE TESTS
Operating temperature: -30°C + 120°C

C) PACKAGING INFORMATION
Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS
On request

CODE	ARTICLE	ø D	L	H	h	BAG	BOX	WEIGHT
61 3315 0011	SAM/ 1x11	10 - 11	44	10.5	21	20	500	16
61 3315 0014	SAM/ 1x1/2" S (14)	13 - 14	50	13.5	27	20	500	24
61 3315 0012	SAM/ 1x1/2" (17)	16 - 17	50	13.5	27	20	500	22
61 3315 0021	SAM 1x5/8" S (21)	20 - 21	59	19	38	20	100	40
61 3315 0078	SAM/ 1x7/8 (28)	27 - 28	59	19	38	20	100	32
61 3315 0114	SAM/ 1x1.1/4" (40)	39 - 40	70	27	54	20	100	50
61 3315 0158	SAM/ 1x1.5/8" (52)	50 - 52	80	33	66	20	100	60

RI	DATE	DR	DATE	AP	Description:
02					
01					
00	15/12/16	G.S.	15/12/16	A.V.	
1 ST EMISSION					
					
					
					SAM - Hinged Single Saddles The internal indentation allows gripping on the cable without compressing nor deforming it. The saddle size is calibrated and corresponds to the diameter of the coaxial cables. A flexible hinge (patented) allows a controlled opening and closing of the two shells