
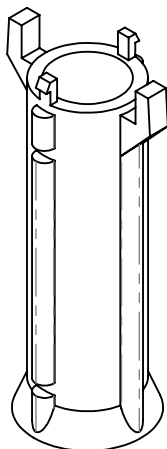


PRODUCT DATA SHEET

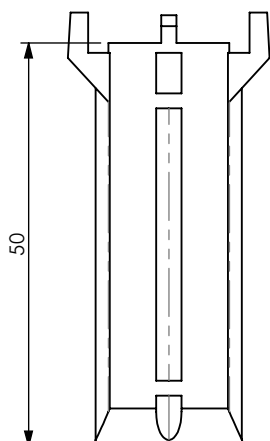

A) SPECIFICATIONS

Material: P.A.6 UL94-V0
 Self Extinguishing, black colour,
 halogen free (according to UL94-V0).
 UV -Proof 1000 h test, according
 BS ISO 105-B06.
 Working temperature: -40°C +125°C.
 Installation temperature: -20°C +60°C.

B) ACCEPTANCE TEST

Visual and dimensional control on samples.

C) DELIVERY MODALITIES

Packing in boxes. Label indicating:
 product code, article, quantity,
 production batch, FIMO logo and figure.
 (Customer code on request).

code	6160002450
article	DRA 24/50

	
50	212 g.

RI	DATE	DR	DATE	AP	<i>Description:</i> <i>DRA 24/50 BLACK</i>
02					
01					
00	06/10/15	G.S.	06/10/15	A.V.	
	1 ST EMISSION				
					<i>Use:</i> <i>To keep RAC cable clamps separated from the wall. Fixing with P.A. plug R8/SP</i>