


# PRODUCT DATA SHEET

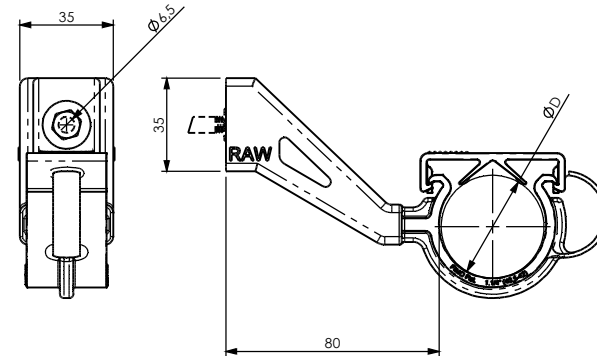

## A) SPECIFICATIONS

1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).

## B) OPERATING TEMPERATURE


Working temperature : -40°C +125°C.  
Installation temperature : -20°C +60°C.

## C) DELIVERY MODALITIES

Packing in boxes. Label indicating: product code, article, quantity, production batch, FIMO logo and figure. ( Customer code on request ).

## D) MOUNTING INSTRUCTIONS

IT043

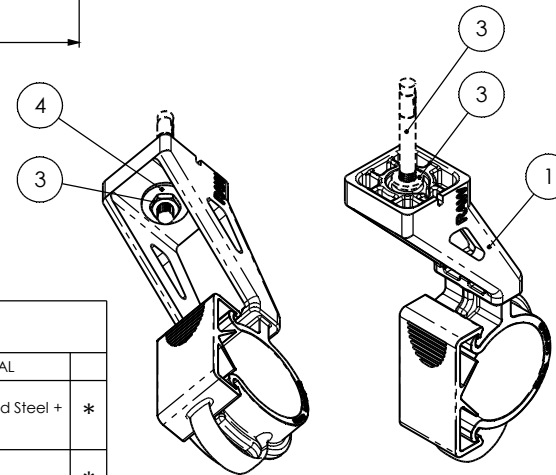

| ANCHOR SOLUTIONS           |                            |                            |                                     |   |
|----------------------------|----------------------------|----------------------------|-------------------------------------|---|
| ITEM N.                    | CODE                       | DESCRIPTION                | MATERIAL                            |   |
| 3<br>4                     | 1013010655 +<br>0129360618 | MF 6x 55/25 +<br>RPI 6/18  | Galvanized Mild Steel +<br>AISI 304 | * |
| OPTION                     | 1013020665 +<br>0129360618 | MF1 6x 65/25 +<br>RPI 6/18 | AISI 304 + AISI 304                 | * |
| OPTION                     | ME25010188                 | R8- 80 SP                  | Galvanized Mild Steel +<br>NYLON PA |   |
| code<br><b>6150010115</b>  |                            |                            |                                     |   |
| article<br>RAW 1.1/4" M-80 |                            |                            |                                     |   |

| D       |    |          |
|---------|----|----------|
| 40.5-42 | 50 | 0.0587kg |

| RI                                                                                                                                                                                                                                                        | DATE       | DR   | DATE       | AP   | Description:<br><br><b>RAW 1.1/4" M-80<br/>Radiating Cable Clamps</b>                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------|------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 02                                                                                                                                                                                                                                                        |            |      |            |      |                                                                                                                                                                                     |
| 01                                                                                                                                                                                                                                                        |            |      |            |      |                                                                                                                                                                                     |
| 00                                                                                                                                                                                                                                                        | 02/12/2016 | E.B. | 02/12/2016 | A.V. |                                                                                                                                                                                     |
| 1" EMISSION                                                                                                                                                                                                                                               |            |      |            |      |                                                                                                                                                                                     |
| <div><div><p>Setting Installation Standards</p></div><div><p>RoHS</p></div></div> |            |      |            |      | Use: <i>Horizontal or vertical installation of<br/>radiating cables in tunnel</i><br><br><i>* Suitable for installation in high speed<br/>railway tunnel application (350 km/h)</i> |

F.I.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress  
Copyright F.I.MO.TEC. S.p.a. All rights reserved.