
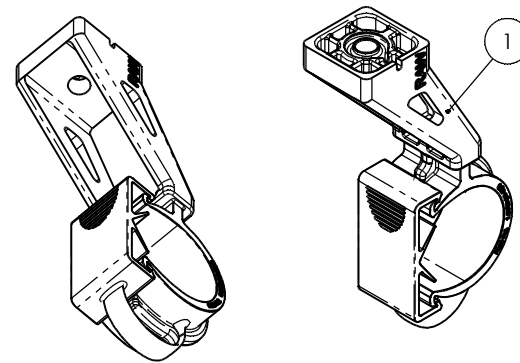


# PRODUCT DATA SHEET

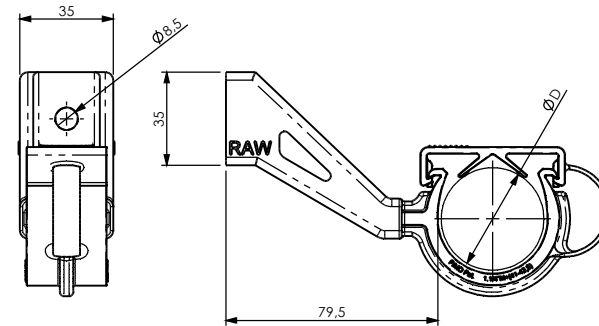

## A) SPECIFICATIONS

1 Cable clamp. Material: PA6-V0, black colour, self extinguishing, halogen free (according to UL94-V0).

## B) OPERATING TEMPERATURE

Working temperature : -40°C +125°C.  
Installation temperature : -20°C +60°C.



## C) DELIVERY MODALITIES



Packing in boxes. Label indicating:  
product code, article, quantity,  
production batch, FIMO logo and figure.  
( Customer code on request ).

## D) MOUNTING INSTRUCTIONS

IT043

code	<b>6150010116</b>
article	RAW 1.1/4" M+/80 M8

<b>D</b>		
41-42.5	50	0.0901kg

RI	DATE	DR	DATE	AP	Description:  <b>6150010116</b> <b>Radiating Cable Clamps</b>
02					
01					
00	23/05/19	G.S.	23/05/19	A.V.	
1 <sup>st</sup> EMISSION					
 Setting Installation Standards					 RoHS
					Use: Horizontal or vertical installation of radiating cables in tunnel  * Suitable for installation in high speed railway tunnel application (350 km/h)

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress  
Copyright FI.MO.TEC. S.p.a. All rights reserved.