


PRODUCT DATA SHEET

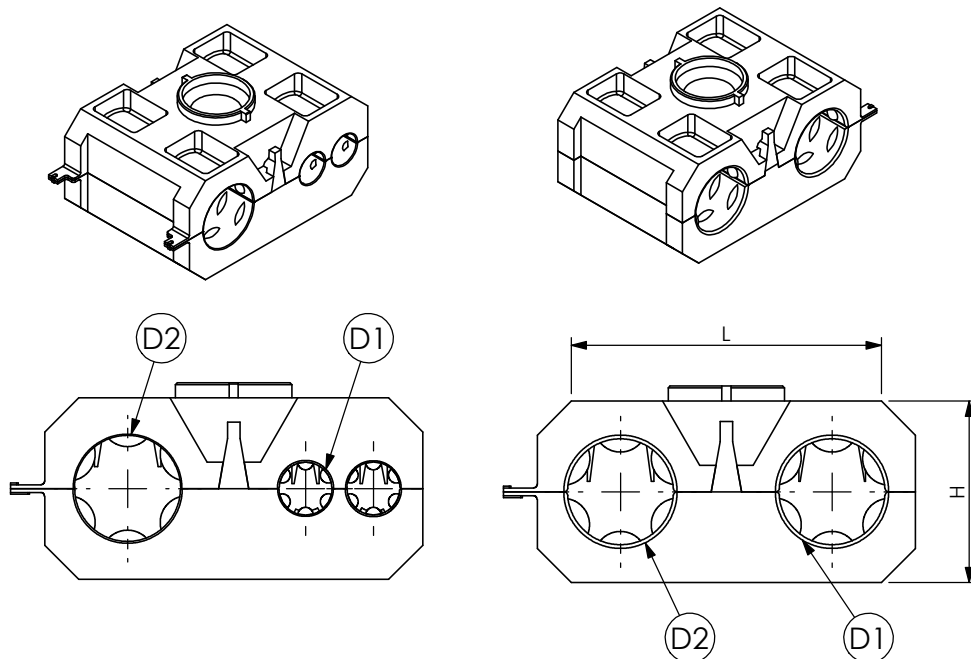

A) SPECIFICATIONS

P.A. U.V. resistant

B) RESISTANCE TESTS

Operating temperature:
-30°C + 120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D1	ø D2	H	L	BAG	BOX	WEIGHT
Standard Line								
61 3307 7205	SAC 2x5	4 - 5	4 - 5	18.5	34	20	500	18
61 3307 7265	SAC 2x6,5	4.5 - 6.5	4.5 - 6.5	18.5	34	20	500	16
61 3307 7207	SAC 2x7	5 - 7	5 - 7	18.5	34	20	500	17
61 3307 7209	SAC 2x9	7 - 9	7 - 9	18.5	34	20	500	14
61 3307 7211	SAC 2x11	9 - 11	9 - 11	18.5	34	20	500	12
61 3307 2214	SAC 2x14	11 - 14	11 - 14	24	46	20	500	25
61 3307 2212	SAC 2x1/2"	14 - 17	14 - 17	24	46	20	500	19
61 3307 2220	SAC 2x20	17 - 20	17 - 20	33	58	20	500	42
61 3307 2221	SAC 2x21	19 - 21	19 - 21	33	58	20	500	37
Hybrid Saddles								
61 3307 0507	SAC 1x5+1x7	4 - 5	5 - 7	18.5	34	20	500	12
61 3307 0511	SAC 1x5+1x11	4 - 5	9 - 11	18.5	34	20	500	16
61 3307 0709	SAC 1x7+1x9	5 - 7	7 - 9	18.5	34	20	500	16
613307 0711	SAC 1x7+1x11	5 - 7	9 - 11	18.5	34	20	500	15
61 3307 0514	SAC 1x5+1x14	4 - 5	11 - 14	24	46	20	500	29
61 3307 0714	SAC 1x7+1x14	5 - 7	11 - 14	24	46	20	500	28
613307 0717	SAC 1x7+1x17	5 - 7	14 - 17	24	46	20	500	25
0633070911N1	SAC 1x9+1x11	7 - 9	9 - 11	18.5	34	20	500	15
0633072712N1	SAC 2x7+1x12	5 - 7	9 - 12	24	46	20	500	23
0633072717N1	SAC 2x7+1x17	5 - 7	14 - 17	24	46	20	500	25
61 3307 0914	SAC 1x9+1x14	7 - 9	11 - 14	24	46	20	500	27
61 3307 2714	SAC 2x7+1x14	5 - 7	11 - 14	24	46	20	500	27
61 3307 0720	SAC 1x7+1x20	5 - 7	17 - 20	33	58	20	500	54

RI	DATE	DR	DATE	AP	Description: SAC - saddles Calibrated Double Saddles with Flexible Hinge for RF, RG and FO
02					
01					
00	15/12/16	G.S.	15/12/16	A.V.	
1 ST EMISSION					
 Setting Installation Standards 					

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.