


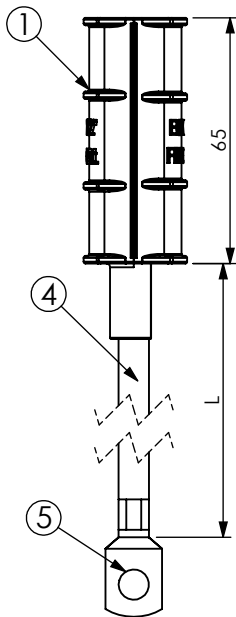



PRODUCT DATA SHEET



A) SPECIFICATIONS

- 1 Plastic hinged shell: P.A.
- 2 Sealant Isobutylene strip
- 3 Inner Contact: tinned brass
- 4 16 sqmm Connection cable:
Lg.500mm PE 7 wires copper cable.
- 5 Cable lug Ø8: Tinned copper

B) RESISTANCE TESTS

Waterproof test:

IP 68 (FIMO Test according to IEC60529 normative).

Contact Resistance $\leq 1\text{m}\Omega$

Maximum current handling : 100kA

Operating temperature : $-40^{\circ}\text{C} + 130^{\circ}\text{C}$

C) PACKAGING INFORMATION

Packing: 1 pcs in a bag

10 bags in a box.

Label indicating:

product code, article, quantity,

production batch,

FIMO logo and figure.

(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST 050

code	6115080012
article	EGK 1/2"

D	L		
16-17	450	10	0.135kg

RI	DATE	DR	DATE	AP	Description:
02					No Tools Grounding Kit
01	15/05/2025	G.S.	15/05/2025	A.V.	
	UPDATED				
00	08/04/2015	G.S.	08/04/2015	A.V.	
	1 ST EMISSION				
 Building Sustainable Innovation					Use:
					Grounding kits for coaxial cables.