

PRODUCT DATA SHEET

A) SPECIFICATIONS

- 1 Tinned Brass contact bar
- 2 Butyl strip
- 3 Tin-plated copper mesh
- 4 Protecting and sealing self-agglomerating silicon tape. Color black on reel
- 5 Stainless Steel M8 connection screw
- 6 Stainless Steel grower washer
- 7 Rigid 7x1.70= 16mm² copper cable, black PE insulation
- 8 Cable lug Ø8: Tinned copper

B) RESISTANCE TEST

Lightning test:

Peak Current 100 kA (10/350 µs)
 Charge 50C
 Protection Level III-IV in accordance with
 IEC 61312-1 Standard

Water Tightness:

IP 68 (FIMO Test in accordance with IEC60529)

Corrosion Test:

Salt Spray test in accordance with
 ISO 9227 Standard

Contact Resistance: <= 1 mOhm

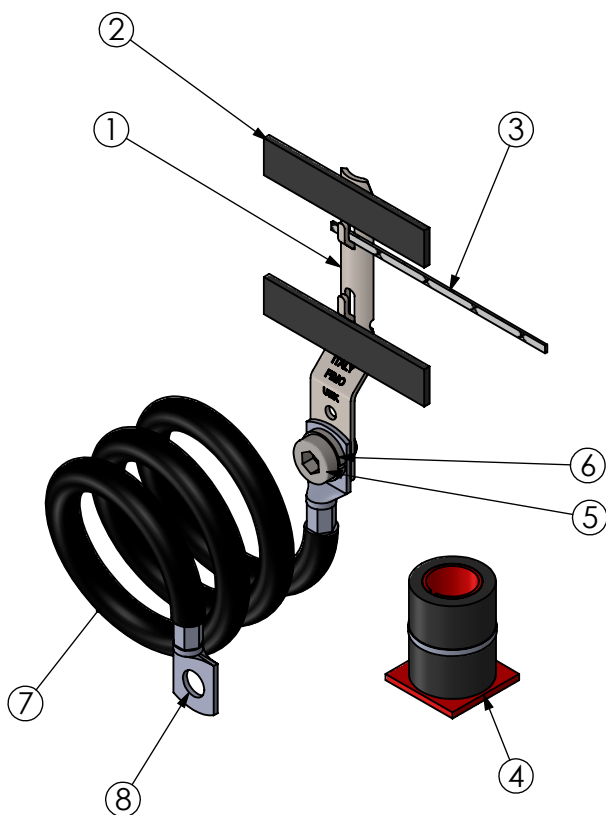
Operating Temperature: -50°C +80 °C

C) DELIVERY MODALITIES



Packing in boxes ok 10 kits
 Label indicanting:
 product code, article, production, batch
 FIMO logo and picture
 (customer code on request)



D) MOUNTING INSTRUCTION

UEK IST 024 REV 0



code	6115020001
article	UEK 1

	
10	0.0725kg

RI	DATE	DR	DATE	AP	<i>Description:</i> UEK 1=universal earthing kit d. 5-11
02					
01	14/03/2016	E.B.	14/03/2016	A.V.	
	Updating resistance test				
00	17/06/2014	E.B.	17/06/2014	A.V.	
1 ST EMISSION					
 Building Sustainable Innovation					<i>Use:</i> Earthing of coaxial cables and elliptic or rectangular waveguides Coaxial Cable : RG 223 - RG58 - RG59 - RG 8 - RG213/214 1/4"- 3/8" Elliptic guide : 220 - 380

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
 Copyright FI.MO.TEC. S.p.a. All rights reserved.