

PRODUCT DATA SHEET



Connecting cable

A) MATERIAL

Contact: Tin Plated Copper
Connecting cable: P.E. Insulated Copper
According to CEI 20-22.
Colour: Black
M8 screws: Stainless Steel

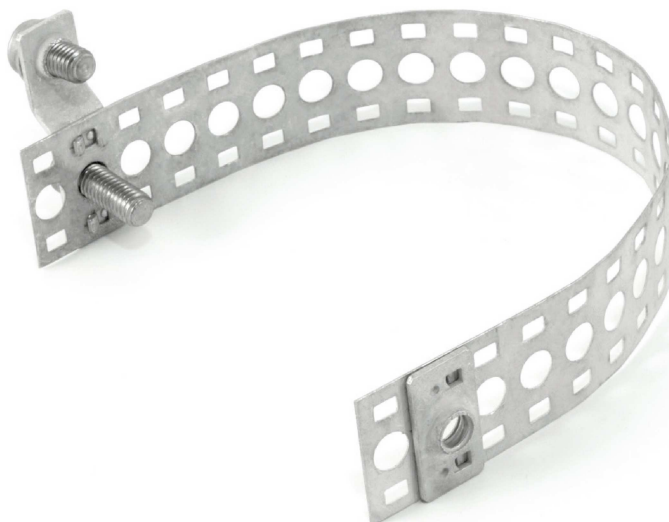
B) ACCEPTANCE TEST

Visual and dimensional control on samples



C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

FMT



| CODE | ARTICLE | DESCRIPTION | FOR CONNECTORS | øD | BAG | BOX | WEIGHT |
|--------------|-----------|---|----------------|-------|-----|-----|--------|
| 61 1503 1580 | FMT 15/80 | Punched tinned copper strip 30x0,5, adjustable length | 1/4" - 2.1/4" | 15-80 | 10 | 100 | 170 |

| RI | DATE | DR | DATE | AP | Description: FMT - Grounding Kits Complete with 16 mm2 connecting cable. Lightning test according to standard IEC 61312-1 grade III (CESI). |
|---|----------|------|---|------|---|
| 02 | | | | | |
| 01 | | | | | |
| 00 | 29/01/16 | G.S. | 29/01/16 | A.V. | |
| 1 ST EMISSION | | | | | |
|  | | |  | | |