

PRODUCT DATA SHEET

A) SPECIFICATIONS

P.A. 6 U.V. resistant
Colour: black .

B) RESISTANCE TESTS

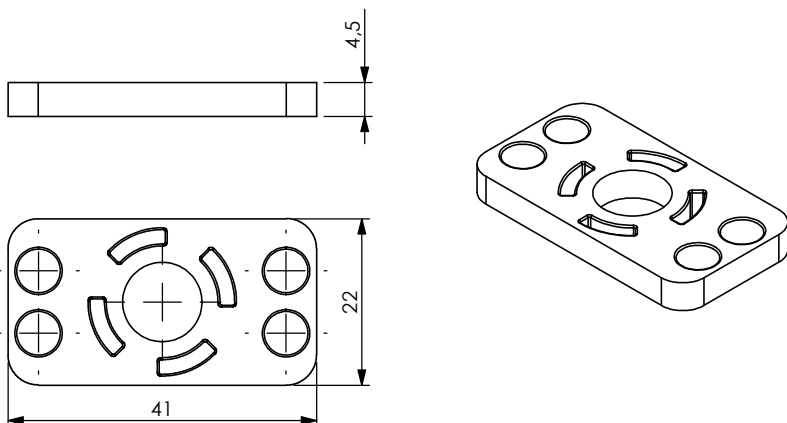
Operating temperature: -30°C + 120°C

C) PACKAGING INFORMATION



Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).



D) MOUNTING INSTRUCTIONS

On request



| | |
|---------|-------------------------------------|
| code | 6132090802 |
| article | UAS - Universal Adaptor for Saddles |

| | |
|---|---|
|  |  |
| 100 | 0.0032kg |

| RI | DATE | DR | DATE | AP | Description: |
|---|----------|------|----------|---|--|
| 02 | | | | | |
| 01 | | | | | |
| 00 | 13/04/16 | G.S. | 13/04/16 | A.V. | |
| 1 ST EMISSION | | | | | |
|  | | | |  | Use: UAS Universal Adaptor for saddles is a pla-stic spacer used to combine different mo-dels of FIMO saddles. UAS is also combinable with BAP 10 pla-stic socle. |