

PRODUCT DATA SHEET

A) SPECIFICATIONS




Calibrated double saddles
Fiberglass P.P. U.V. resistant

B) RESISTANCE TEST

Operating temperature: -50°C +80°C

C) DELIVERY MODALITIES

Packing in boxes. Label indicating:
product code, article, quantity,
production batch, FIMO logo and figure.
(Customer code on request).

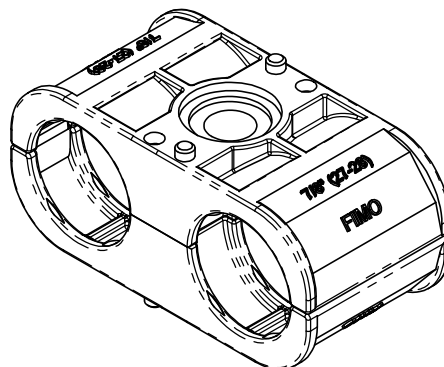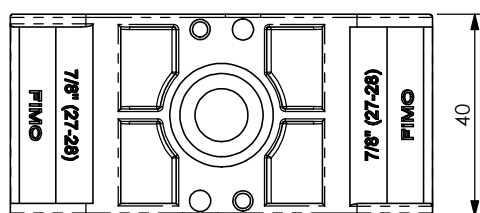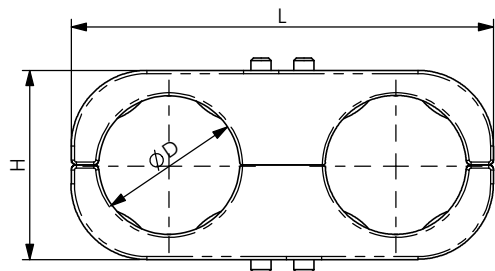

CODE	ARTICLE	ø D	H	L	BAG	BOX	WEIGHT
61 3307 4055	SEB 2x5M	4,5 - 5,5	16	42	20	500	18
61 3307 4008	SEB 2x8	6 - 8	20	51	20	500	25
61 3307 4009	SEB 2x9	8 - 9	20	51	20	500	25
61 3307 4011	SEB 2x11	10 - 11	20	51	20	500	25
61 3307 4013	SEB 2x13	12 - 13	27	60	20	500	36
61 3307 4014	SEB 2x1/2"S	13 - 14	27	60	20	500	31
61 3307 4012	SEB 2x1/2" (17)	16 - 17	27	60	20	500	29
61 3307 4058	SEB 2x5/8" (23)	21 - 23	37	84	20	100	51
61 3307 4078	SEB 2x7/8" (28)	27 - 28	37	84	20	100	46
61 3307 4114	SEB 2x1.1/4" (40)	39 - 40	54	108	20	100	72
61 3307 4158	SEB 2x1.5/8" (52)	50 - 52	66	133	20	100	92
61 3307 4214	SEB 2x2.1/4" (60)	58 - 60	74	149	20	100	114

RI	DATE	DR	DATE	AP	Description:
02					
01					
00	31/03/16	G.S.	31/03/16	A.V.	
1 ST EMISSION					
					Use: Calibrated saddles for coaxial cables to use with universal cable clamps

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.

PRODUCT DATA SHEET

A) SPECIFICATIONS




Calibrated double saddles
Fiberglass P.P. U.V. resistant

B) RESISTANCE TEST

Operating temperature: -50°C +80°C

C) DELIVERY MODALITIES

Packing in boxes. Label indicating:
product code, article, quantity,
production batch, FIMO logo and figure.
(Customer code on request).

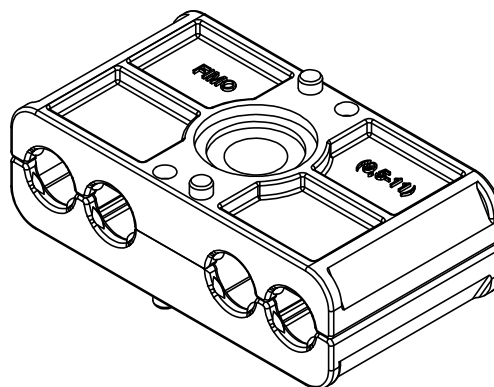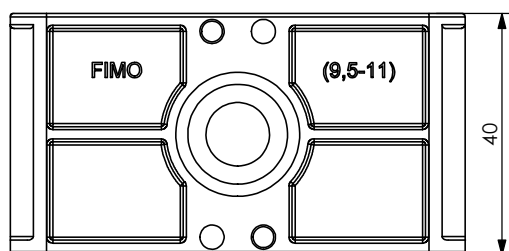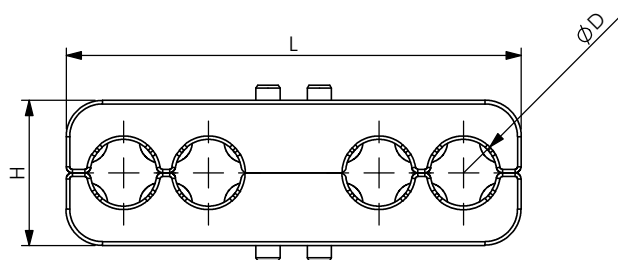

CODE	ARTICLE	Ø D	H	L	BAG	BOX	WEIGHT
61 3307 4465	SEB 4x6M	5,5 - 6,5	20	59	20	500	27
61 3307 4411	SEB 4x11	9,5 - 11	24	75	20	500	35

RI	DATE	DR	DATE	AP	Description: SEB - Calibrated double saddles
02					
01	15/01/18	G.S.	15/01/18		
	UPDATE				
00	31/03/16	G.S.	31/03/16	A.V.	
1 ST EMISSION					Use: Calibrated saddles for coaxial cables to use with universal cable clamps
					