


PRODUCT DATA SHEET

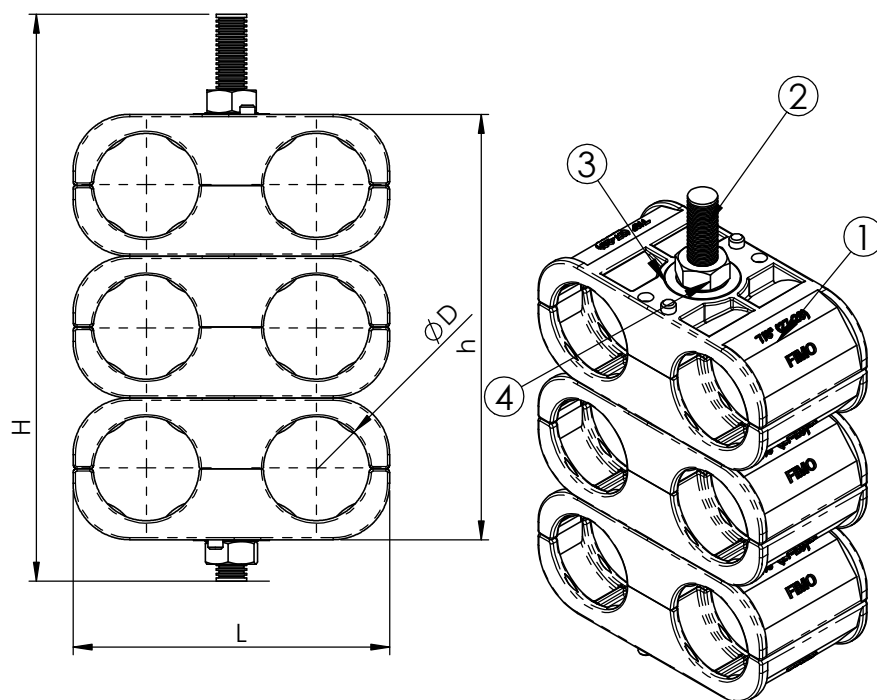

A) SPECIFICATIONS

- 1 SEB Single saddle P.P. black
- 2 Threaded bar - BFI M8 (SS)
- 3 Washers (SS)
- 4 Hexagonal Nuts M8 (SS)

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C DELIVERY MODALITIES

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

on request

CODE	ARTICLE	Ø D	L	h	H	BOX	WEIGHT
61 1586 0608	UMO 6x8	7 - 8	51	60	100	20	112
61 1586 0609	UMO 6x9	8 - 9	51	60	100	20	112
61 1586 0611	UMO 6x11	10 - 11	51	60	100	20	112
61 1586 0613	UMO 6x13	12 - 13	60	81	125	20	153
61 1586 0614	UMO 6x1/2"S*	13 - 14	60	81	125	20	153
61 1586 0612	UMO 6x1/2" (17)	16 - 17	60	81	125	20	153
61 1586 0658	UMO 6x5/8" (23)	21 - 23	84	111	150	20	238
61 1586 0678	UMO 6x7/8" (28)	27 - 28	84	111	150	20	238
61 1586 6114	UMO 6x1.1/4" (40)	39 - 40	108	162	200	20	306
61 1586 6158	UMO 6x1.5/8" (52)	50 - 52	133	198	250	20	387

article

UMO 6

RI	DATE	DR	DATE	AP	Description:
02					Twin cable clamps for flat iron with holes <i>For 6 coaxial cables, complete with 6 calibrated saddles. For articles see schedule.</i>
01					
00	13/04/16	G.S.	13/04/16	A.V.	
1 ST EMISSION					
					Use: Fastening of 6 coaxial cables on flat iron with holes

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.