


PRODUCT DATA SHEET

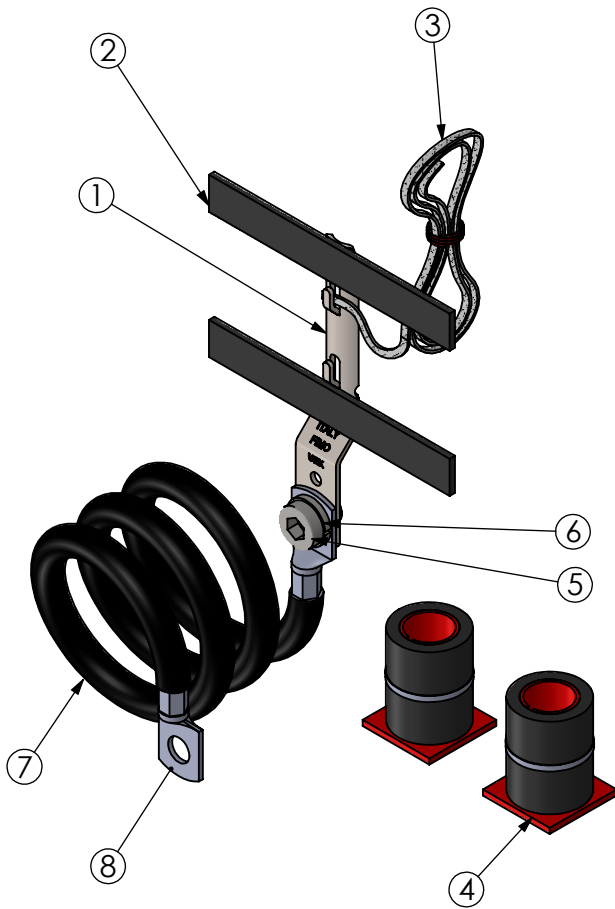

A) SPECIFICATIONS

- 1 Tinned Brass contact bar
- 2 Butyl strip
- 3 Tin-plated copper mesh
- 4 Protecting and sealing self-agglomerating silicone tape. Color black on reel
- 5 Stainless Steel M8 connection screw
- 6 Stainless Steel grower washer
- 7 Rigid 7x1.70= 16mm² copper cable, black P.E. insulation
- 8 Cable lug Ø8: Tinned copper

B) RESISTANCE TEST

Lightning test:

Peak Current 100 kA (10/350 µs)

Charge 50C

Protection Level III-IV in accordance with IEC 61312-1 Standard

Water Tightness:

IP 68 (FIMO Test in accordance with IEC60529)

Corrosion Test:

Salt Spray test in accordance with ISO 9227 Standard

Contact Resistance: <= 1 mOhm

Operating Temperature: -50°C +80 °C

C) DELIVERY MODALITIES

Packing in boxes ok 10 kits

Label indicanting:

product code, article, production, batch

FIMO logo and picture

(customer code on request)

D) MOUNTING INSTRUCTION

UEK IST 024 REV 0

code	6115020002
article	UEK 2

	
10	0.0823kg

RI	DATE	DR	DATE	AP	<i>Description:</i> UEK 2=universal earthing kit d. 12-30
02					
01	14/03/2016	E.B.	14/03/2016	A.V.	
	Updating resistance test				
00	17/06/2014	E.B.	17/06/2014	A.V.	
1 st EMISSION					<i>Use:</i> Earthing of coaxial cables and elliptic or rectangular waveguides Coaxial Cable : 1/2"S - 3/8" - 1/2" - 5/8" - 7/8"S - 7/8" Elliptic guide : 105 - 127 - 130 - 150 - 190
 Building Sustainable Innovation					