


PRODUCT DATA SHEET

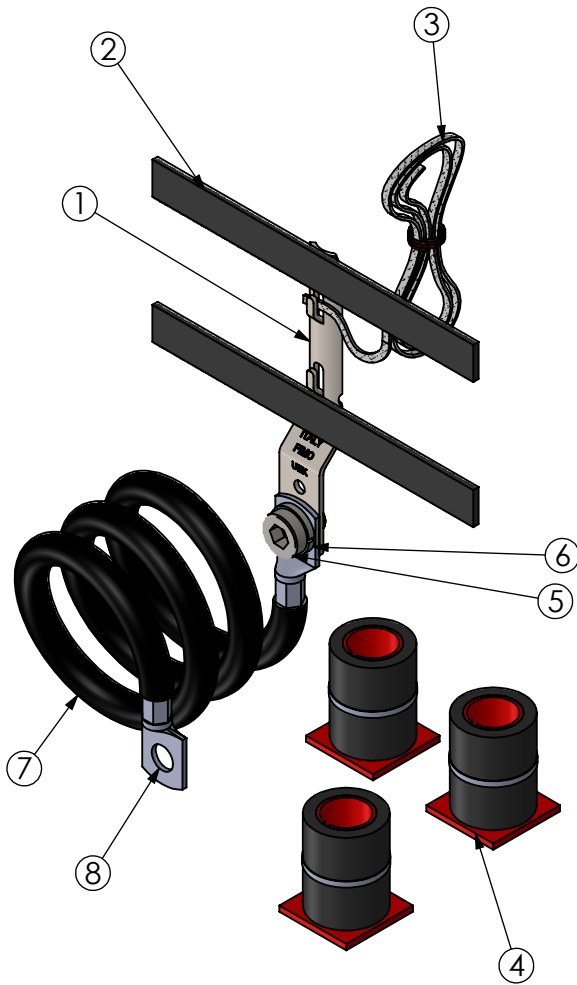

A) SPECIFICATIONS

- 1 Tinned Brass contact bar
- 2 Butyl strip
- 3 Tin-plated copper mesh
- 4 Protecting and sealing self-agglomerating silicone tape. Color black on reel
- 5 Stainless Steel M8 connection screw
- 6 Stainless Steel grower washer
- 7 Rigid 7x1.70= 16mm² copper cable, black P.E. insulation
- 8 Cable lug Ø8: Tinned copper

B) RESISTANCE TEST

Lightning test:

Peak Current 100 kA (10/350 µs)
Charge 50C
Protection Level III-IV in accordance with IEC 61312-1 Standard

Water Tightness:

IP 68 (FIMO Test in accordance with IEC60529)

Corrosion Test:

Salt Spray test in accordance with ISO 9227 Standard

Contact Resistance: <= 1 mOhm

Operating Temperature: -50°C +80 °C

C) DELIVERY MODALITIES

Packing in boxes ok 10 kits
Label indicanting:
product code, article, production, batch
FIMO logo and picture
(customer code on request)

D) MOUNTING INSTRUCTION

UEK IST 024 REV 0

code	6115020003
article	UEK 3

	
10	0.0928kg

RI	DATE	DR	DATE	AP	<i>Description:</i> UEK 3=universal earthing kit d. 31-60
02					
01	17/06/2014	E.B.	17/06/2014	A.V.	
	Updating resistance test				
00	17/06/2014	E.B.	17/06/2014	A.V.	
1 ST EMISSION					<i>Use:</i> Earthing of coaxial cables and elliptic or rectangular waveguides Coaxial Cable : 1.1/4" - 1.5/8" - 2.1/4" Elliptic guide : 38 - 46 - 48 - 54 - 60 - 70 - 77 - 78 - 90
					