

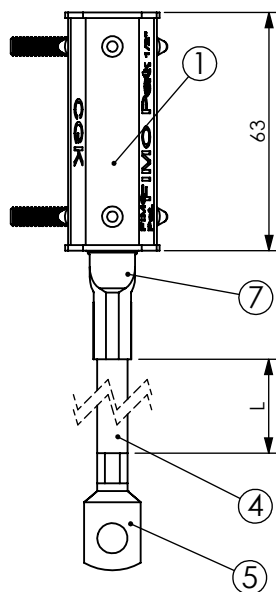


PRODUCT DATA SHEET



A) SPECIFICATIONS

- 1 Shell: Stainless steel.
- 2 Hexagon socket head Screw: Stainless steel VCI 5x30
- 3 Gasket: Rubber EPDM.
- 4 16sqmm Connection cable: L=500 PE rigid copper cable.
- 5 Cable lug Ø8: Tinned copper.
- 6 Inner Contact: Tinned brass.
- 7 Contact bar: Tinned brass.

B) RESISTANCE TESTS

Waterproof test:

IP 68 (FIMO Test according to IEC60529 normative).

Environmental Resistance Test: IEC 68-2-14

Salt Fog Test: UNI 9227

Contact Resistance $\leq 1\text{m}\Omega$

Operating Temperature $-40^{\circ}\text{C} +85^{\circ}\text{C}$

C) PACKAGING INFORMATION

Packing in boxes.

Label indicating:

product code, article, quantity,

production batch,

FIMO logo and figure.

(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST 045

code	6115090012
article	CGK 1/2" M

D	L		
16-17	500	10	0.2151kg

RI	DATE	DR	DATE	AP	<i>Description:</i> <i>Grounding Kit</i>
02					
01					
00	16/12/2014	E.B.	16/12/2014	A.V.	
1 ST EMISSION					
 <i>Building Sustainable Innovation</i>					<i>Use:</i> <i>Earthing of coaxial cables.</i>

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
 Copyright FI.MO.TEC. S.p.a. All rights reserved.