


PRODUCT DATA SHEET

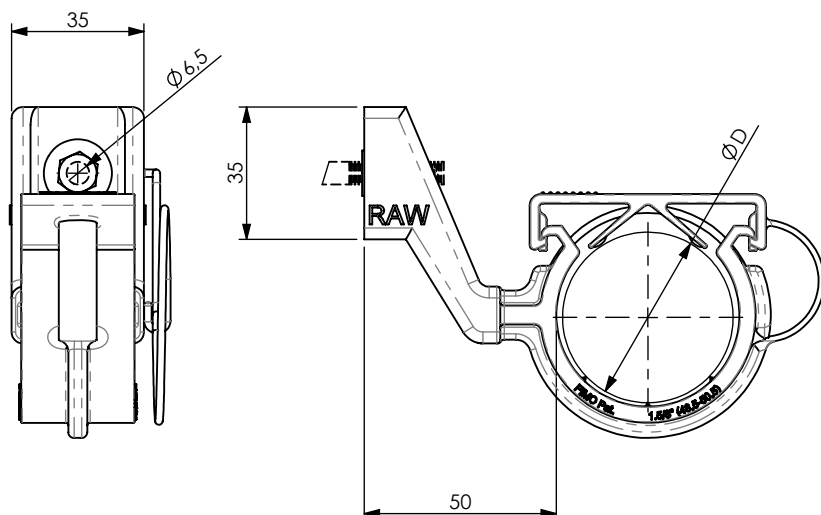

A) SPECIFICATIONS

- 1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).
- 2 Stainless Steel RSD safety clamp

B) OPERATING TEMPERATURE


Working temperature : $-40^{\circ}\text{C} + 125^{\circ}\text{C}$.
Installation temperature : $-20^{\circ}\text{C} + 60^{\circ}\text{C}$.

C) DELIVERY MODALITIES

Packing in boxes. Label indicating:
product code, article, quantity,
production batch, FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IT043

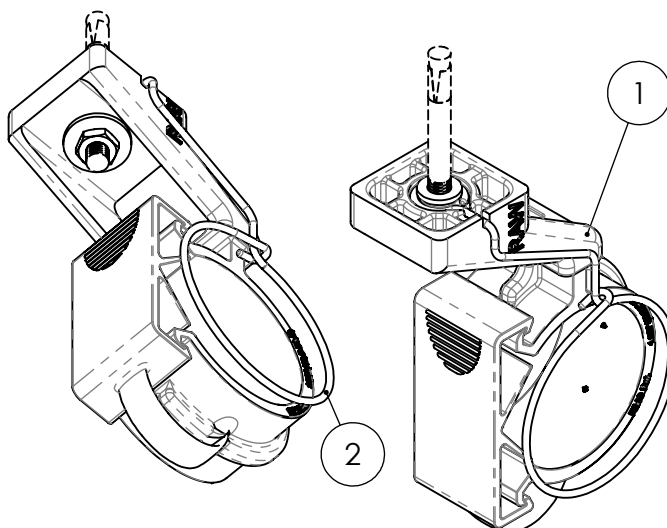

code	6150215158
article	RAW 1.5/8"-50 + RSD 1.5/8"-50

D		
48.5-50.5	50	0.0674kg

RI	DATE	DR	DATE	AP	<i>Description:</i> RAW 1.5/8"-50 + RSD 1.5/8"-50 Radiating Cable Clamps
02					
01					
00	05/12/2016	E.B.	05/12/2016	A.V.	
1 ST EMISSION					
					<i>Use: Installation of radiating cables in tunnel</i> <i>* Suitable for installation in high speed railway tunnel application (350 km/h)</i>

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.