PRODUCT DATA SHEET

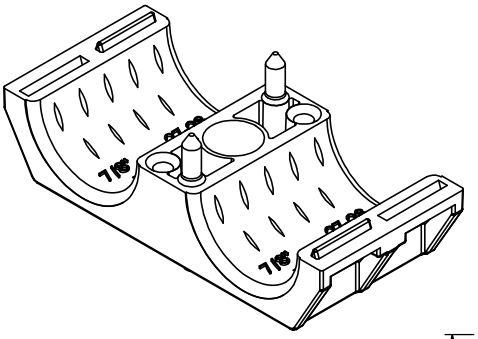

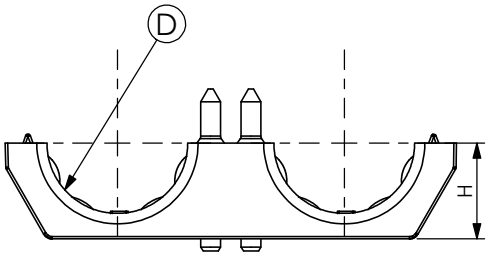

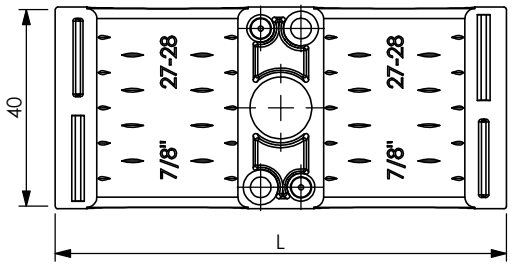

A) SPECIFICATIONS
P.P. U.V. resistant

B) RESISTANCE TESTS
Operating temperature: -30°C + 120°C

C) PACKAGING INFORMATION
Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS
On request

CODE	ARTICLE	ø D	H	L	BAG	BOX	WEIGHT
61 3307 5007	SAB/ 2x7	5 - 7	10.5	56	20	500	14
61 3307 5009	SAB/ 2x9	8 - 9	10.5	56	20	500	14
61 3307 5011	SAB/ 2x11	10 - 11	10.5	56	20	500	14
61 3307 5013	SAB/ 2x13	12 - 13	13.5	68	20	500	18
61 3307 5014	SAB/ 2x1/2"S (14)	13 - 14	13.5	68	20	500	18
61 3307 5038	SAB/ 2x3/8" (16)	15 - 16	13.5	68	20	500	18
61 3307 5012	SAB/ 2x1/2" (17)	16 - 17	13.5	68	20	500	18
61 3307 5058	SAB/ 2x5/8" (23)	21 - 23	19	90	20	100	25
61 3307 5078	SAB/ 2x7/8" (28)	27 - 28	19	90	20	100	25
61 3307 5118	SAB/ 2x1.1/8" (38)	36 - 38	27	114	20	100	30
61 3307 5114	SAB/ 2x1.1/4" (40)	39 - 40	27	114	20	100	30
61 3307 5148	SAB/ 2x1.5/8"S (49)	48 - 49	33	137	20	100	40
61 3307 5158	SAB/ 2x1.5/8" (52)	50 - 52	33	137	20	100	40

RI	DATE	DR	DATE	AP
02				
01				
00	15/12/16	G.S.	15/12/16	A.V.
	1ST EMISSION			

FIMO
Building Sustainable Innovation

RoHS

Description:

SAB - Calibrated Twin Saddles

The internal indentation allows gripping on the cable without compressing nor deforming it.
The fitting of the two saddles is calibrated and corresponds to the diameter of the coaxial cables.

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.