


# PRODUCT DATA SHEET

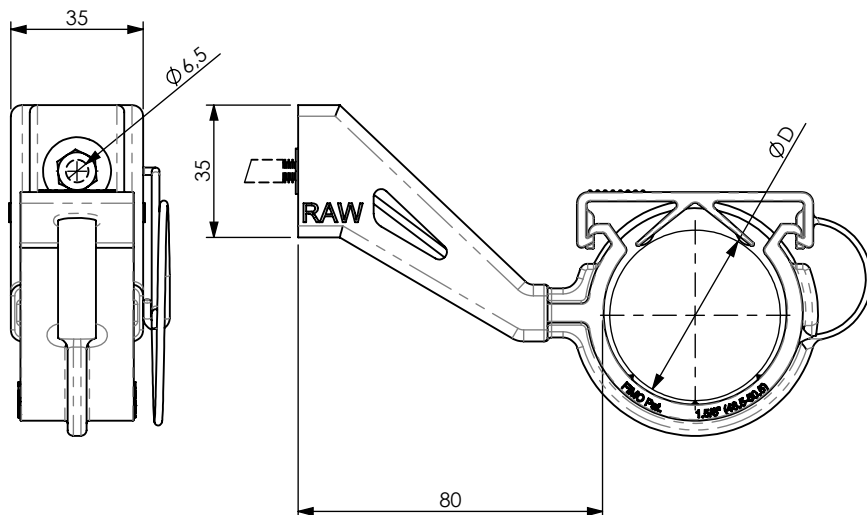

## A) SPECIFICATIONS

- 1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).
- 2 Stainless Steel RSD safety clamp

## B) OPERATING TEMPERATURE


Working temperature : -40°C +125°C.  
Installation temperature : -20°C +60°C.

## C) DELIVERY MODALITIES

Packing in boxes. Label indicating: product code, article, quantity, production batch, FIMO logo and figure. ( Customer code on request ).

## D) MOUNTING INSTRUCTIONS

IT043

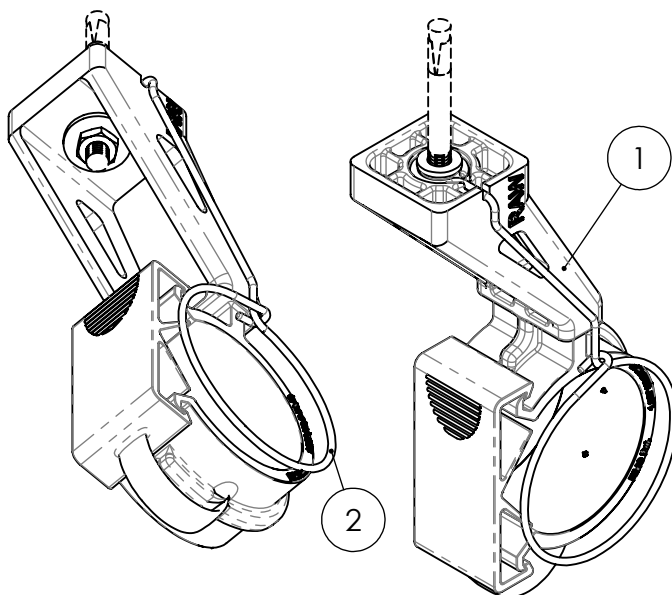

|         |                               |
|---------|-------------------------------|
| code    | <b>6150210158</b>             |
| article | RAW 1.5/8"-80 + RSD 1.5/8"-80 |

|           |    |          |
|-----------|----|----------|
| <b>D</b>  |    |          |
| 48.5-50.5 | 50 | 0.4259kg |

| RI                                                                                  | DATE       | DR   | DATE       | AP                                                                                  | <i>Description:</i><br><br><b>RAW 1.5/8"-80 + RSD 1.5/8"-80<br/>Radiating Cable Clamps</b>                                                                                          |
|-------------------------------------------------------------------------------------|------------|------|------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 02                                                                                  |            |      |            |                                                                                     |                                                                                                                                                                                     |
| 01                                                                                  |            |      |            |                                                                                     |                                                                                                                                                                                     |
| 00                                                                                  | 05/12/2016 | E.B. | 05/12/2016 | A.V.                                                                                |                                                                                                                                                                                     |
| 1 <sup>ST</sup> EMISSION                                                            |            |      |            |                                                                                     |                                                                                                                                                                                     |
|  |            |      |            |  | <i>Use: Horizontal or vertical installation of<br/>radiating cables in tunnel</i><br><br><i>* Suitable for installation in high speed<br/>railway tunnel application (350 km/h)</i> |

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress  
Copyright FI.MO.TEC. S.p.a. All rights reserved.