
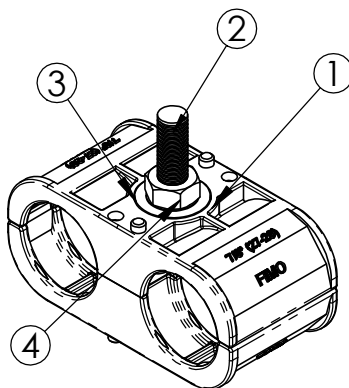


# PRODUCT DATA SHEET

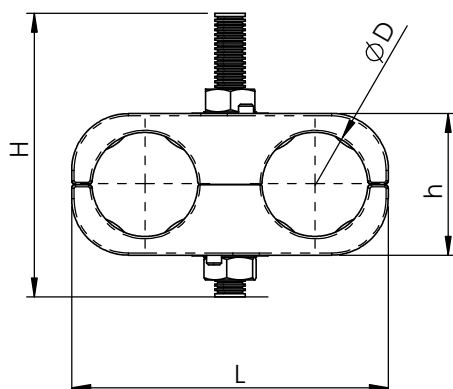

## A) SPECIFICATIONS

- 1 SEB Single saddle P.P. black
- 2 Threaded bar - BFI M8 (SS)
- 3 Washers (SS)
- 4 Hexagonal Nuts M8 (SS)

## B) RESISTANCE TESTS

UV Test BS-ISO 105-B06  
Vibration test conforming to UNI 60068-2-6  
Operating temperature: -30°C +120°C

## C) DELIVERY MODALITIES

Packing in boxes.  
Label indicating:  
product code, article, quantity,  
production batch,  
FIMO logo and figure.  
( Customer code on request ).

## D) MOUNTING INSTRUCTIONS

on request

| CODE         | ARTICLE           | Ø D     | L   | h  | H   | BOX | WEIGHT |
|--------------|-------------------|---------|-----|----|-----|-----|--------|
| 61 1586 0208 | UMO 2x8           | 7 - 8   | 51  | 20 | 75  | 20  | 58     |
| 61 1586 0209 | UMO 2x9           | 8 - 9   | 51  | 20 | 75  | 20  | 58     |
| 61 1586 0211 | UMO 2x11          | 10 - 11 | 51  | 20 | 75  | 20  | 58     |
| 61 1586 0213 | UMO 2x13          | 12 - 13 | 60  | 27 | 75  | 20  | 71     |
| 61 1586 0214 | UMO 2x1/2"S*      | 13 - 14 | 60  | 27 | 75  | 20  | 71     |
| 61 1586 0212 | UMO 2x1/2" (17)   | 16 - 17 | 60  | 27 | 75  | 20  | 71     |
| 61 1586 0258 | UMO 2x5/8" (23)   | 21 - 23 | 84  | 37 | 75  | 20  | 112    |
| 61 1586 0278 | UMO 2x7/8" (28)   | 27 - 28 | 84  | 37 | 75  | 20  | 112    |
| 61 1586 2114 | UMO 2x1.1/4" (40) | 39 - 40 | 108 | 54 | 100 | 20  | 144    |
| 61 1586 2158 | UMO 2x1.5/8" (52) | 50 - 52 | 133 | 66 | 125 | 20  | 153    |

article

**UMO 2**

| RI                                                                                  | DATE     | DR   | DATE     | AP                                                                                  | Description:<br><br><b>Twin cable clamps for flat iron with holes</b><br><i>For 2 coaxial cables, complete with 2 calibrated saddles.<br/>For articles see schedule.</i> |
|-------------------------------------------------------------------------------------|----------|------|----------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 02                                                                                  |          |      |          |                                                                                     |                                                                                                                                                                          |
| 01                                                                                  |          |      |          |                                                                                     |                                                                                                                                                                          |
| 00                                                                                  | 13/04/16 | G.S. | 13/04/16 | A.V.                                                                                |                                                                                                                                                                          |
| 1 <sup>ST</sup> EMISSION                                                            |          |      |          |                                                                                     |                                                                                                                                                                          |
|  |          |      |          |  | Use:<br><br><i>Fastening of 2 coaxial cables on flat iron with holes</i>                                                                                                 |

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress  
Copyright FI.MO.TEC. S.p.a. All rights reserved.