

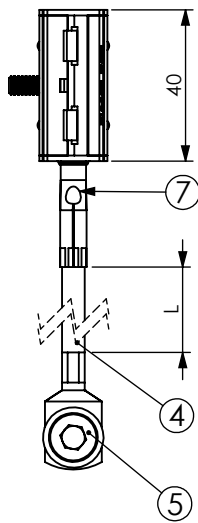


PRODUCT DATA SHEET



A) SPECIFICATIONS

- 1 Shell: Stainless steel.
- 2 Hexagon socket head Screw: Stainless steel VCI 5x20
- 3 Gasket: Rubber EPDM.
- 4 10 sqmm Connection cable: L=500 PE rigid copper cable.
- 5 Cable lug Ø8: Tinned copper. Including earthing screw kit (screw VCI 8x20; nut DAI 8, washers REG 8 + RPI 8/16).
- 6 Inner Contact: Tinned brass.
- 7 Contact bar: Tinned brass.

B) RESISTANCE TESTS

Waterproof test:

IP 68 (FIMO Test according to IEC60529 normative).

Contact Resistance $\leq 1\text{m}\Omega$

Operating Temperature $-40^{\circ}\text{C} +85^{\circ}\text{C}$

Environmental Test IEC 68-2-14

Lightning Test MIL STD 1757

Corrosion Resistant

C) PACKAGING INFORMATION

Packing in boxes.

Label indicating:

product code, article, quantity,

production batch,

FIMO logo and figure.

(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST 046

code	6115409007
article	KMT 7 P E

D	L		
19	500	10	0.0911kg

RI	DATE	DR	DATE	AP	<i>Description:</i> <i>Grounding Kit</i>
02					
01					
00	08/03/2017	E.B.	08/03/2017	A.V.	
1 ST EMISSION					
					<i>Use:</i> <i>Earthing of coaxial cables.</i>

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.