




# PRODUCT DATA SHEET

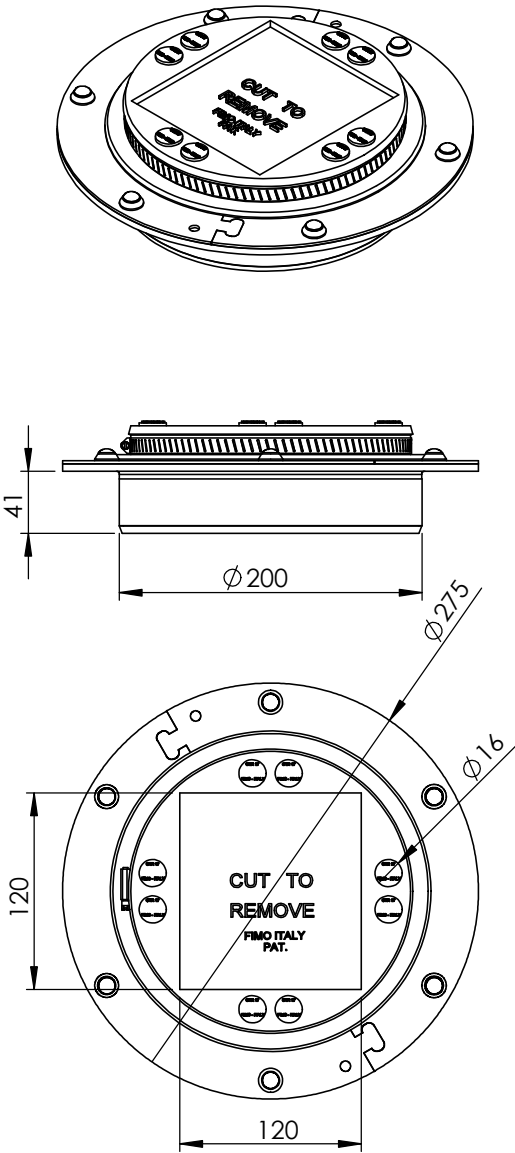

CERTIFICATION	
IEC 60529 IP67	Waterproof
EN 1366-3:2009	Fire Resistant
MATERIAL	
Gasket	Black EPDM U.V. Resistant
Flange	AISI 304 Stainless Steel
Hose Clamp	AISI 304 Stainless Steel
Internal Collar	AISI 304 Stainless Steel

code	<b>6115130200</b>
article	PTR 200/120 SQ=pass. par. stag. 1p.d.200

1	1.9994Kg.

RI	DATE	DR	DATE	AP	Description:
02					
01					
00	21/10/14	G.S.	21/10/14	A.V.	
1 <sup>ST</sup> EMISSION					
					The central square 120x120 opening is temporarily sealed with a removable rubber sheet. The opening is conceived to house <b>GPR</b> rectangular cushions with different diameter round holes. Additional eight diam. 16 mm holes for smaller cables, combined with <b>GRR-16</b> reductions, have been foreseen. The final sealing is ensured by tightening the hose clamp.