
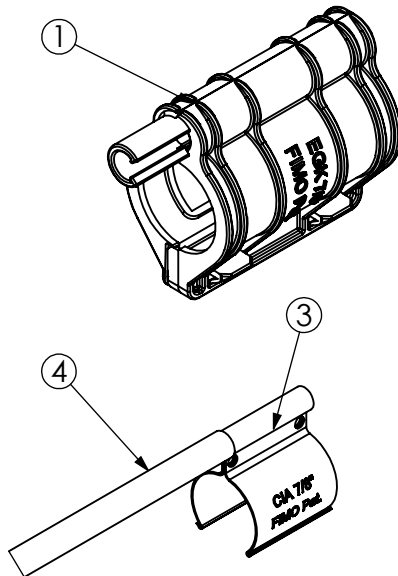
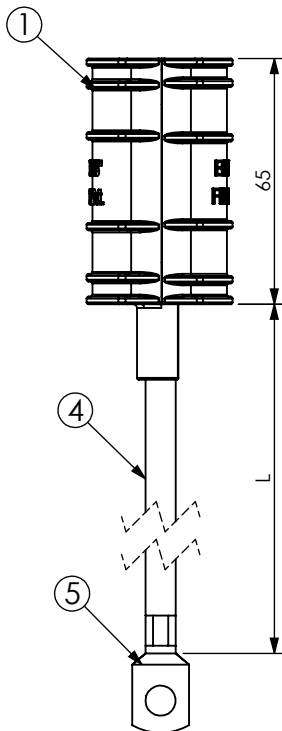
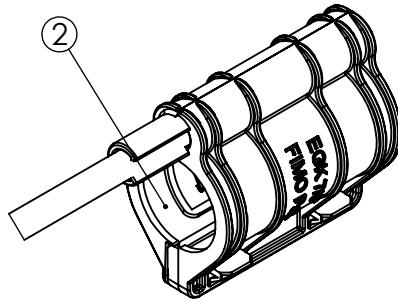


PRODUCT DATA SHEET



A) SPECIFICATIONS

- 1 Plastic hinged shell: P.A.
- 2 Sealant Isobutylene strip
- 3 Inner Contact: tinned brass
- 4 16 sqmm Connection cable:
Lg.500mm PE 7 wires copper cable.
- 5 Cable lug Ø8: Tinned copper

B) RESISTANCE TESTS

Waterproof test:

IP 68 (FIMO Test according to IEC60529 normative).

Contact Resistance $\leq 1\text{mOhm}$

Maximum current handling : 100kA

Operating temperature : -40 °C + 130°C

C) PACKAGING INFORMATION

Packing: 1 pcs in a bag

10 bags in a box.

Label indicating:

product code, article, quantity,

production batch,

FIMO logo and figure.

(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST 050

code	6115080078
article	EGK 7/8"

D	L		
26-28	450	10	0.135kg

RI	DATE	DR	DATE	AP	<i>Description:</i> <i>No Tools Grounding Kit</i>
02					
01	15/05/2025	G.S.	15/05/2025	A.V.	
	UPDATED				
00	08/04/2015	G.S.	08/04/2015	A.V.	
1 ST EMISSION					<i>Use:</i> <i>Grounding kits for coaxial cables.</i>
					

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.