

# PRODUCT DATA SHEET

## A) SPECIFICATIONS

P.A. 6 U.V. resistant  
Colour: black .

## B) RESISTANCE TESTS

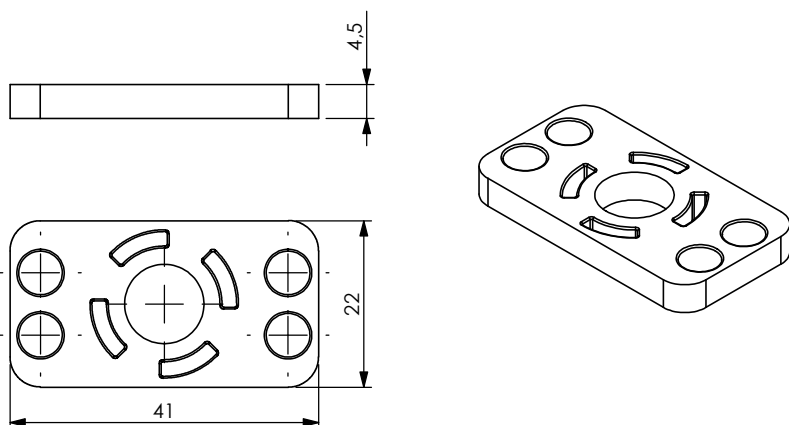
Operating temperature: -30°C + 120°C

## C) PACKAGING INFORMATION



Packing in boxes.  
Label indicating:  
product code, article, quantity,  
production batch,  
FIMO logo and figure.  
( Customer code on request ).



## D) MOUNTING INSTRUCTIONS

On request



code	<b>6132090802</b>
article	UAS - Universal Adaptor for Saddles

	
100	0.0032kg

RI	DATE	DR	DATE	AP	Description:
02					
01					
00	13/04/16	G.S.	13/04/16	A.V.	
1 <sup>ST</sup> EMISSION					
 Setting Installation Standards					Use:  <b>UAS</b> Universal Adaptor for saddles is a pla-stic spacer used to combine different mo-dels of FIMO saddles. <b>UAS</b> is also combinable with <b>BAP 10</b> pla-stic socle.