


# PRODUCT DATA SHEET

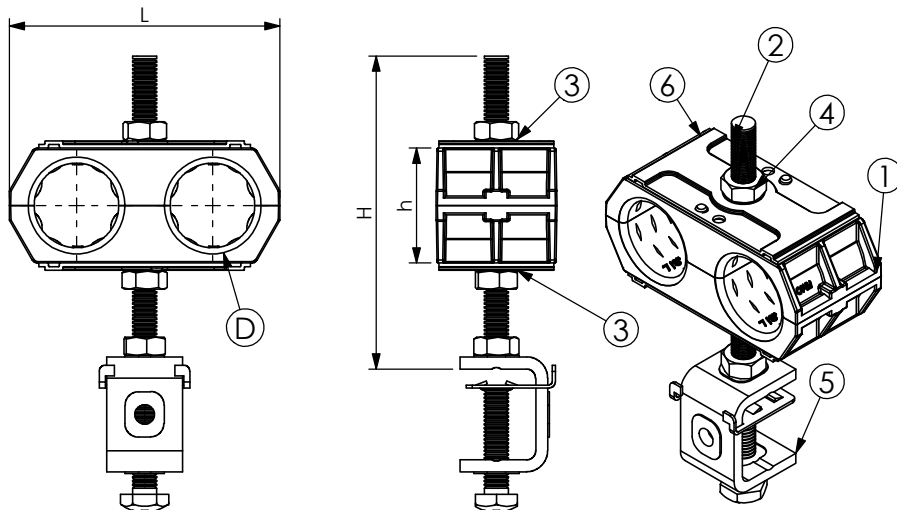

## A) SPECIFICATIONS

- 1 H.D.P.E. SAB double saddle
- 2 Stainless steel threaded bar BFI M8
- 3 Stainless steel elastic washer REI 8
- 4 Stainless steel hexagonal nut DAI 8
- 5 Stainless steel MIM clamp
- 6 Stainless steel pressure plate PRUC

## B) RESISTANCE TESTS

UV Test BS-ISO 105-B06  
Vibration test conforming to UNI 60068-2-6  
Operating temperature: -50°C +80°C


## C) PACKAGING INFORMATION

Packing in boxes.  
Label indicating:  
product code, article, quantity,  
production batch,  
FIMO logo and figure.  
( Customer code on request ).

## D) MOUNTING INSTRUCTIONS

On request

| CODE         | ARTICLE             | Ø D     | L   | h   | H  | BOX | WEIGHT |
|--------------|---------------------|---------|-----|-----|----|-----|--------|
| 61 1576 0209 | UCM/ 2x9            | 8 - 9   | 56  | 75  | 21 | 20  | 170    |
| 61 1576 0211 | UCM/ 2x11           | 10 - 11 | 56  | 75  | 21 | 20  | 170    |
| 61 1576 0213 | UCM/ 2x13           | 12 - 13 | 68  | 75  | 27 | 20  | 175    |
| 61 1576 0214 | UCM/ 2x1/2"S (14)   | 13 - 14 | 68  | 75  | 27 | 20  | 175    |
| 61 1576 0238 | UCM/ 2x3/8" (16)    | 15 - 16 | 68  | 75  | 27 | 20  | 175    |
| 61 1576 0212 | UCM/ 2x1/2" (17)    | 16 - 17 | 68  | 75  | 27 | 20  | 175    |
| 61 1576 0258 | UCM/ 2x5/8" (23)    | 21 - 23 | 90  | 100 | 38 | 20  | 230    |
| 61 1576 0278 | UCM/ 2x7/8" (28)    | 27 - 28 | 90  | 100 | 38 | 20  | 230    |
| 61 1576 2118 | UCM/ 2x1.1/8" (38)  | 36 - 38 | 114 | 150 | 54 | 20  | 230    |
| 61 1576 2114 | UCM/ 2x1.1/4" (40)  | 39 - 40 | 114 | 150 | 54 | 20  | 275    |
| 61 1576 2148 | UCM/ 2x1.5/8"S (49) | 48 - 49 | 137 | 150 | 66 | 20  | 277    |
| 61 1576 2158 | UCM/ 2x1.5/8" (52)  | 50 - 52 | 137 | 150 | 66 | 20  | 275    |

| RI                                                                                  | DATE     | DR   | DATE                                                                                | AP   | Description:                                                                                                                                       |
|-------------------------------------------------------------------------------------|----------|------|-------------------------------------------------------------------------------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| 02                                                                                  |          |      |                                                                                     |      | Cable Clamps type UCO +MIM 8/25<br>without PRUC                                                                                                    |
| 01                                                                                  |          |      |                                                                                     |      |                                                                                                                                                    |
| 00                                                                                  | 06/10/15 | G.S. | 06/10/15                                                                            | A.V. |                                                                                                                                                    |
| 1 <sup>ST</sup> EMISSION                                                            |          |      |                                                                                     |      |                                                                                                                                                    |
|  |          |      |  |      | Use: Fixing of 2 cables on flat 3-25 and round<br>ø 8-25.<br> |