
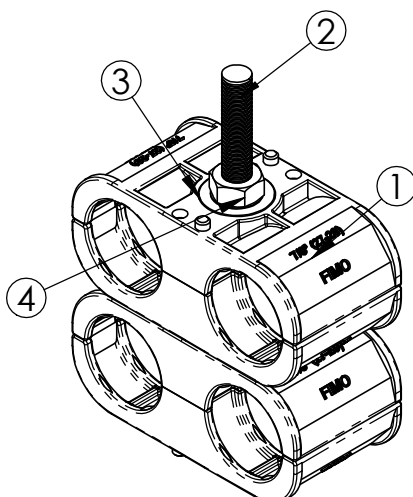


PRODUCT DATA SHEET

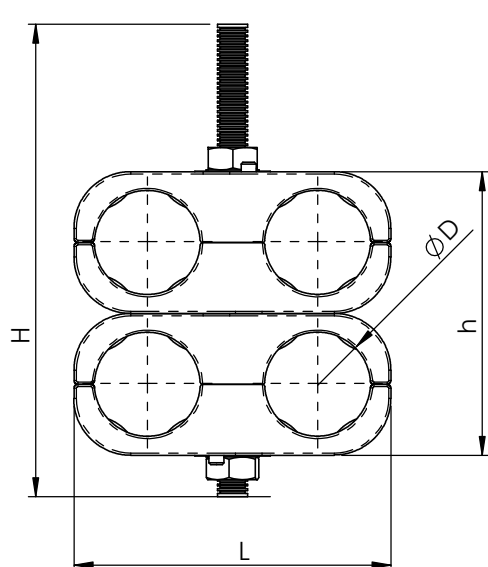

A) SPECIFICATIONS

- 1 SEB Single saddle P.P. black
- 2 Threaded bar - BFI M8 (SS)
- 3 Washers (SS)
- 4 Hexagonal Nuts M8 (SS)

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) DELIVERY MODALITIES

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

on request

CODE	ARTICLE	Ø D	L	h	H	BOX	WEIGHT
61 1586 0408	UMO 4x8	7 - 8	51	40	75	20	81
61 1586 0409	UMO 4x9	8 - 9	51	40	75	20	81
61 1586 0411	UMO 4x11	10 - 11	51	40	75	20	81
61 1586 0413	UMO 4x13	12 - 13	60	54	100	20	108
61 1586 0414	UMO 4x1/2"S*	13 - 14	60	54	100	20	108
61 1586 0412	UMO 4x1/2" (17)	16 - 17	60	54	100	20	108
61 1586 0458	UMO 4x5/8" (23)	21 - 23	84	74	125	20	108
61 1586 0478	UMO 4x7/8" (28)	27 - 28	84	74	125	20	180
61 1586 4114	UMO 4x1.1/4" (40)	39 - 40	108	108	150	20	225
61 1586 4158	UMO 4x1.5/8" (52)	50 - 52	133	132	200	20	225

article

UMO 4

RI	DATE	DR	DATE	AP	Description:
02					Twin cable clamps for flat iron with holes For 4 coaxial cables, complete with 4 calibrated saddles. For articles see schedule.
01					
00	13/04/16	G.S.	13/04/16	A.V.	
1 ST EMISSION					
					Use: Fastening of 4 coaxial cables on flat iron with holes

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.