


PRODUCT DATA SHEET

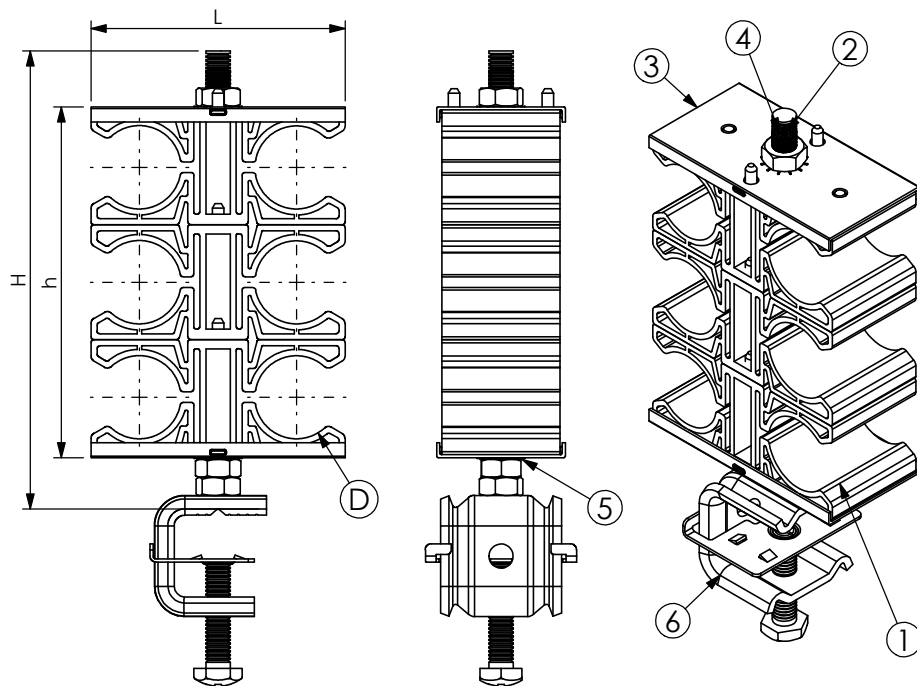

A) SPECIFICATIONS

- 1 Calibrated twin black saddles made in H.D.P.E
- 2 Stainless steel threaded bar BFI M8
- 3 Stainless steel pressure plate PSAL
- 4 Stainless steel hexagonal nut DAI 8
- 5 Stainless steel flat Washer REI 8
- 6 MCM 8 compact clamp

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	Ø D	L	h	H	BOX	WEIGHT
61 1563 6012	LCC/ 6x1/2"	15 - 17	62	125	84	20	300
61 1563 6078	LCC/ 6x7/8"	27 - 29	84	150	117	20	330
61 1563 6114	LCC/ 6x1.1/4"	38 - 40	102	200	153	20	420
61 1563 6158	LCC/ 6x1.5/8"	50 - 52	119	250	186	20	470

RI	DATE	DR	DATE	AP	Description: LCC - LCO+MCM 8 compact clamp • Side Insertion of Cables • Elastic Prefixing • Manual Final Locking
02					
01					
00	03/11/2015	G.S.	03/11/2015	A.V.	
1 ST EMISSION					
FIMO Building Sustainable Innovation			RoHS 	Use: Fastening of 6 cables on flat, round an angular	

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.