


PRODUCT DATA SHEET

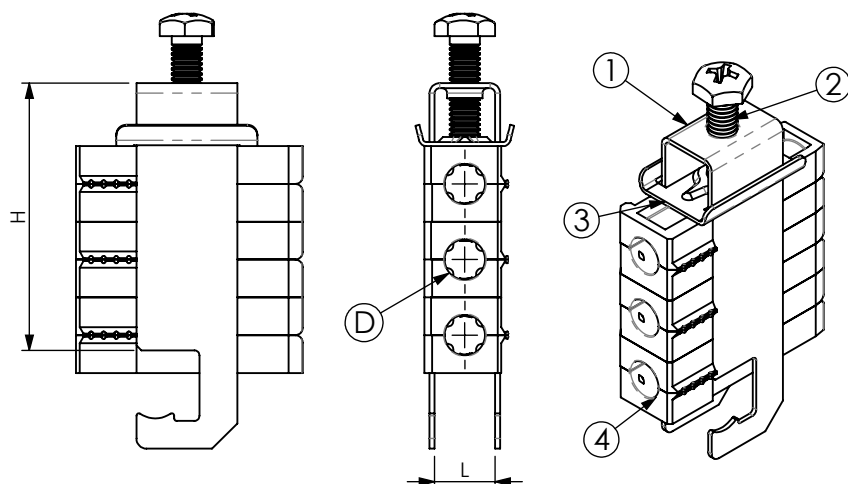

A) SPECIFICATIONS

- 1 Stainless steel bow
Hooking on section 40x22, PSI 30x12,
flat and round 3-12mm
- 2 Self-locking pressure screw M6
- 3 Stainless steel sliding pressure plate.
- 4 DAS/DAT black P.A. saddles

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	ø D	L	H	WEIGHT
61 1549 0305	mRF E/ 3x5	4 - 5	12	55	48
61 1549 0306	mRF E/ 3x6	5 - 6	12	55	48
61 1549 0307	mRF E/ 3x7	6 - 7	12	55	48
61 1549 0308	mRF E/ 3x8	7 - 8	12	55	48
61 1549 0309	mRF E/ 3x9	8 - 9	12	55	42
61 1549 0310	mRF E/ 3x10	10 - 11	12	55	42
61 1549 0312	mRF E/ 3x1/2" (17)	16 - 17	22	91	130
61 1549 0378	mRF E/ 3x7/8" (28)	27 - 28	34	128	231

RI	DATE	DR	DATE	AP	<i>Description:</i> <i>Stainless cable clamps type mRF E For 3 coaxial cables, complete with 3 calibrated saddles. For articles see schedule.</i>
02					
01					
00	29/01/16	G.S.	29/01/16	A.V.	
	1 ST EMISSION				
					<i>Use:</i> <i>Fastening of 3 coaxial cables. Hooking on section 40x22, PSI 30x12, flat and round 3-12mm</i>

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.