

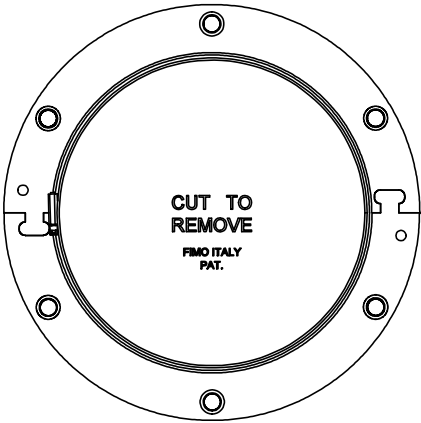
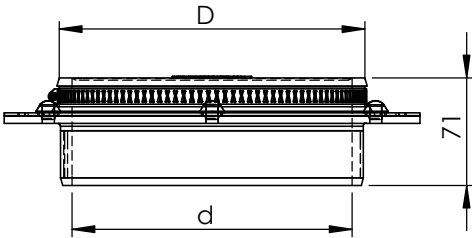


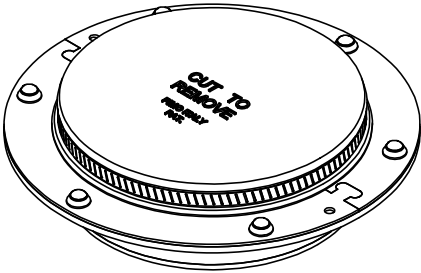

# PRODUCT DATA SHEET



MATERIAL	
Gasket	Black EPDM U.V. Resistant
Flange	AISI 304 Stainless Steel
Hose Clamp	AISI 304 Stainless Steel
Internal Collar	AISI 304 Stainless Steel
CERTIFICATION	
IEC 60529 IP67	Waterproof
EN 1366-3:2009	Fire Resistant

code	<b>6115132185</b>
article	PTR 200/185 RO=pass. par. stag. 1p.d.185

<b>D</b>	<b>d</b>		
200	185	1	1.300 kg.

RI	DATE	DR	DATE	AP	Description:  The central 185 Ø opening is temporarily sealed with an easily removable rubber sheet. The opening is conceived to host broadcasting cables and big diameter pipes, as well as different diameters, thanks to the use of GRR round reduction cushions. The final sealing is ensured by tightening the hose clamp.
02					
01					
00	21/10/14	G.S.	21/10/14	A.V.	
1 <sup>ST</sup> EMISSION					
 Building Sustainable Innovation			