


PRODUCT DATA SHEET

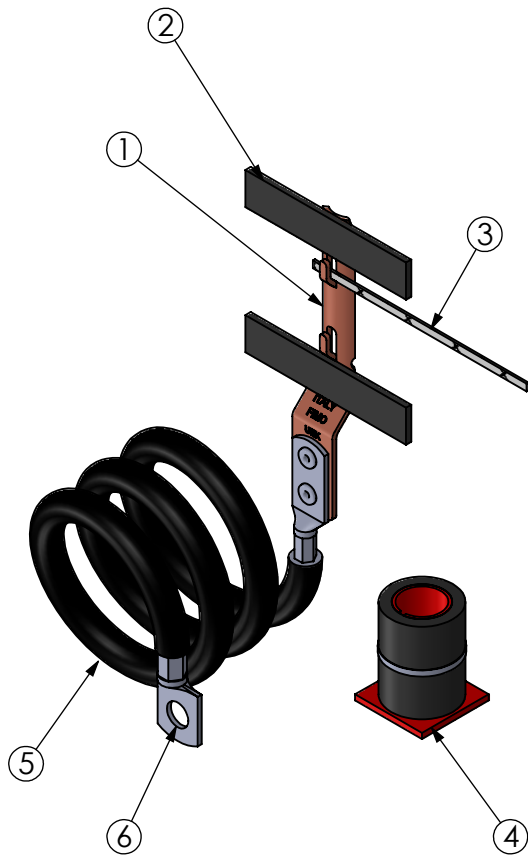

A) SPECIFICATIONS

- 1 Tinned Brass contact bar
- 2 Butyl strip
- 3 Tin-plated copper mesh
- 4 Protecting and sealing self-agglomerating silicone tape. Color black on reel
- 5 Rigid 7x1.70= 16mm² copper cable, black P.E. insulation
- 6 Cable lug Ø8: Tinned copper

B) RESISTANCE TEST

Lightning test:

Peak Current 100 kA (10/350 µs)

Charge 50C

Protection Level III-IV in accordance with IEC 61312-1 Standard

Water Tightness:

IP 68 (FIMO Test in accordance with IEC60529)

Corrosion Test:

Salt Spray test in accordance with ISO 9227 Standard

Contact Resistance: <= 1 mOhm

Operating Temperature: -50°C +80 °C

C) DELIVERY MODALITIES

Packing in boxes ok 10 kits

Label indicanting:

product code, article, production, batch

FIMO logo and picture

(customer code on request)

D) MOUNTING INSTRUCTION

UEK IST 024 REV 0

code	6115050001
article	UEK 1 M

10	0.0644kg

RI	DATE	DR	DATE	AP	<i>Description:</i> UEK 1 M=monoblock earthing Kit for Cables d. 5-11
02					
01					
00	17/06/2014	E.B.	17/06/2014	A.V.	
1 ST EMISSION					
					<i>Use:</i> Earthing of coaxial cables and elliptic or rectangular waveguides Coaxial Cable : RG 223 - RG58 - RG59 - RG 8 - RG213/214 1/4"- 3/8" Elliptic guide : 220 - 250 - 380